



professional soldering - the easy way

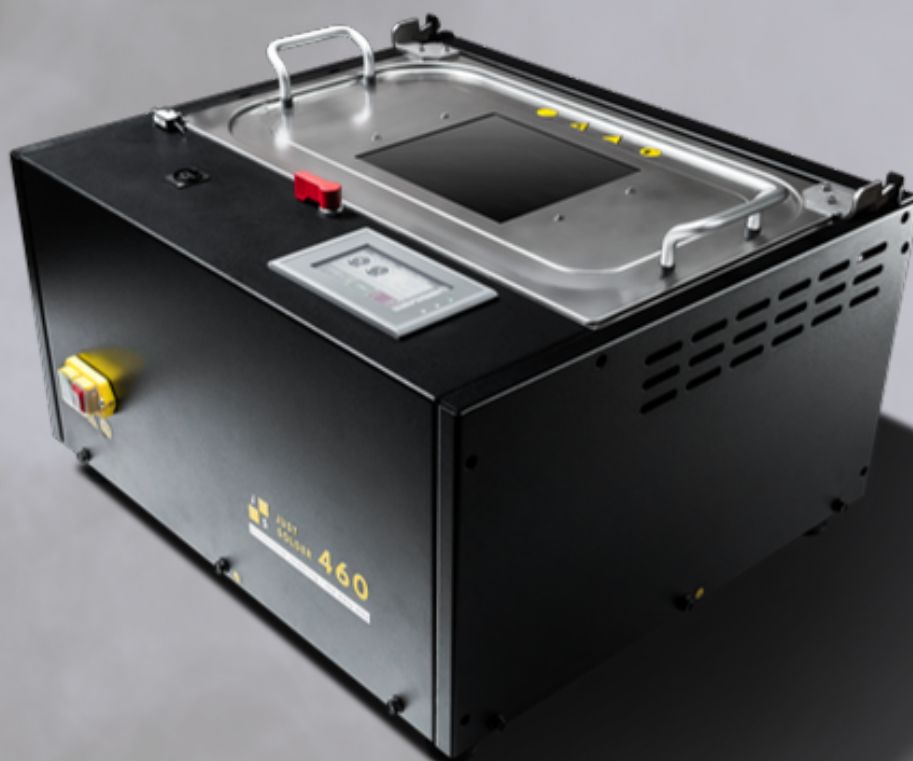

**Made in
Dortmund**

Production and
support person
in Dortmund



Output of soldering
curves and settings via
USB



**User
friendly**

Intuitive operation
via a 4.3" touch
HMI panel



**Beginners
and
professionals**

Plug'n'solder or
individually customize
and adjust soldering
programs



**Efficient &
low-stress**

- 0.25 kWh per cycle
- 230 °C lead free soldering
- Oxygen free soldering



**Perfect for
prototyping
& repair**


Solder all circuit boards
(rigid, rigid-flex, flex,
aluminum, etc.) and
desolder components



**Easy to
install**

- 230 V connection
- Integrated Air cooling

**Simple.
Vapor phase soldering.**

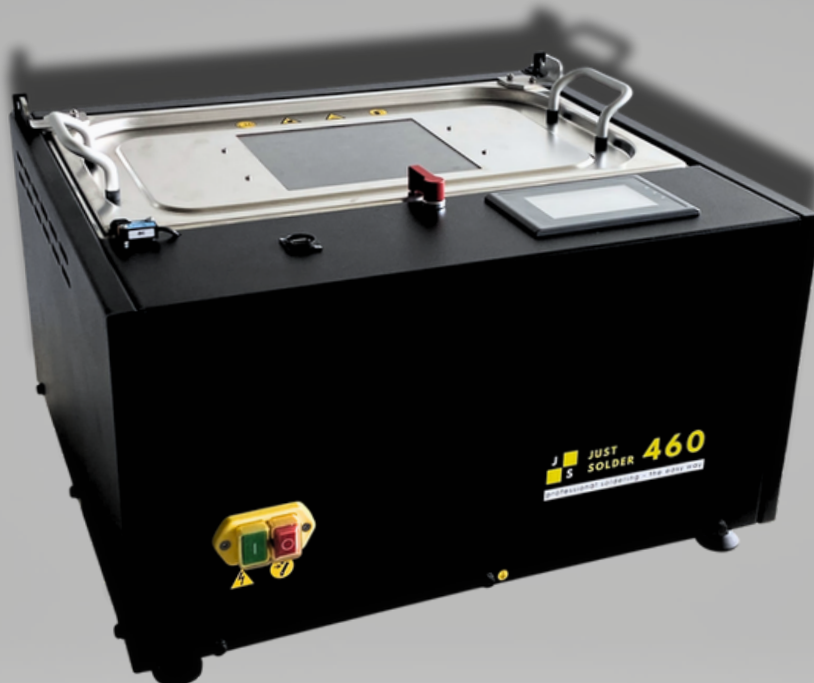

Type	Specification / Data
Dimensions:	590 x 540 x 350 mm (L x W x H)
Weight:	25 kg
Recommended free space:	Left / right / behind each 300 mm
Power connection:	208-240 VAC, 50/60 Hz (Power quality according to EN50160)
Recommended Fuse:	10 A
Electrical Power, max.:	1750 W
Power consumption per cycle:	ca. 0,25 kWh
Connection cable:	CEE 7/4 Schuko-type plug 2,5 m
Noise level:	<70 dB
Max. workpiece size:	460 x 205 x 100 mm or 385 x 265 x 100 mm
Max. workpiece weight:	3 kg
Processtemperatur:	165-240° C (depending on GALDEN TYPE)
Galden filling volume:	0,9 - 1,2 kg
Cooling:	Air-cooled
Display:	4,3" Touch HMI
Datainterface:	USB